


### Electrical Wiring

With wire connectors, connect power cords from outlet box to fixture.

- Black to Black
- White to White
- Green to Ground or to Green Screw on backplate

*Please consult a qualified Electrician if you are not familiar with electrical wiring*

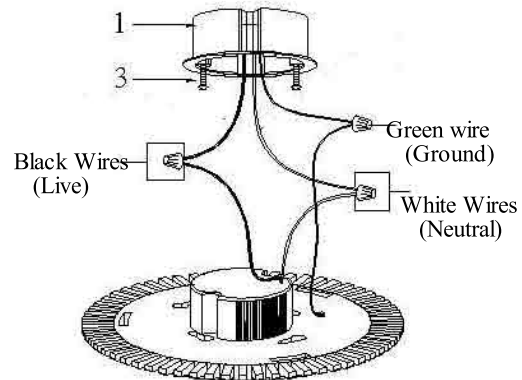

### Assembly Instructions

This fixture can be installed in either a 3" Outlet Box (1) or 4" Outlet box (2)

#### For 4" Outlet box

1. Attach fixture to outlet box by the Key Holes (4) with the screws (3) on the outlet box
2. Tighten Screws (3) on the outlet box from the opposite side (PCB/LED side) to secure fixture
3. Attach Metal Ring (8)/Diffuser (9) set to the fixture by setting the Lips (10) of Plastic Diffuser (9) onto the Slot Hole (6) of the fixture.
  - Turn COUNTER CLOCKWISE to secure

#### For 3" Outlet box

1. Insert Driver into the outlet box until the Die Cast part (7) is flush with the ceiling.
2. Set Screw (3) on Hole (11) on the PCB/LED board and tighten with Screw Driver (12)
  - Repeat for the other hole
  - Note: Hole (11) is aligned with Key Hole (5)*
3. Attach Metal Ring (8)/ Diffuser (9) set to the fixture by setting the Lips (10) of the Plastic Diffuser (9) onto the Slot Hole (6) of the fixture.
  - Turn COUNTER CLOCKWISE to secure

